
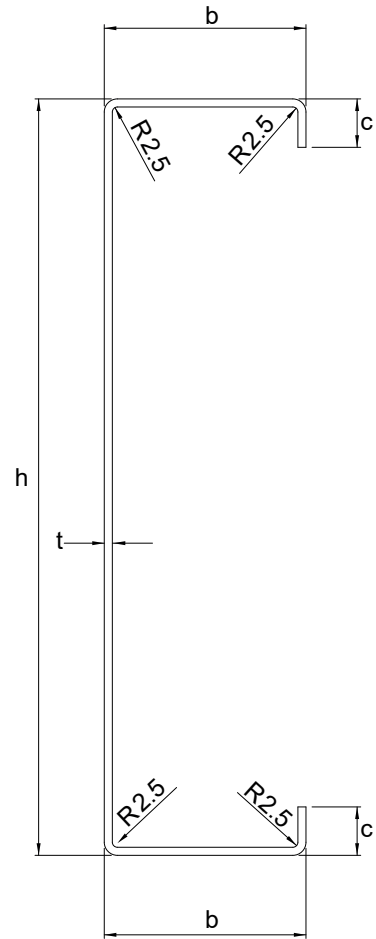


# C PROFILES

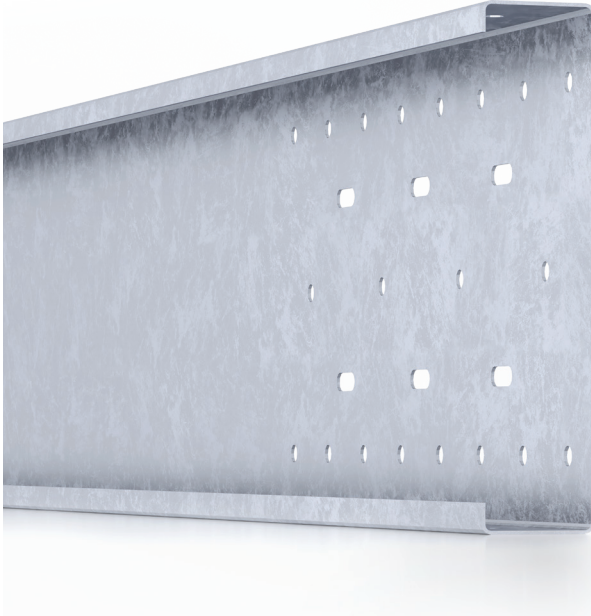

Section Type	h (mm)	b (mm)	c (mm)	t (mm)	G (kg/m)	A (cm <sup>2</sup> )	I <sub>y</sub> (cm <sup>4</sup> )	W <sub>y</sub> (cm <sup>3</sup> )	I <sub>z</sub> (cm <sup>4</sup> )	W <sub>z</sub> (cm <sup>3</sup> )
C 300	300	90	24	4,00	15,5587	19,82	2576	171,7	180,9	80,6
				3,00	11,78285	15,01	1971	131,4	141,6	63,2
				2,50	9,86745	12,57	1659	110,6	120,5	53,8
				2,00	7,9285	10,1	1341	86,4	98,4	44
C 200	200	80	24	4,00	11,91	15,03	908,6	92,72	125,33	23,64
				3,00	9,09	11,45	704,1	71,48	99,16	18,56
				2,50	7,64	9,60	595,0	60,25	84,90	15,78
				2,00	6,16	7,71	481,4	48,63	69,16	12,84
				1,50	4,66	5,78	363,2	36,59	52,65	9,73
C 150	150	50	24	2,50	4,97	6,26	204,5	27,73	17,80	5,01
				2,00	4,02	5,05	166,9	22,55	14,83	4,15
				1,50	3,05	3,79	126,7	17,07	11,48	3,19

The drawings in this brochure are just examples and show some real possibilities of production combinations, we invite you to inquire about any specific requests.

The values indicated in the table are nominal according to the drawings of the profile and vary according to their dimensional parameters, the actual production will be conditioned by the tolerances according to current regulations