



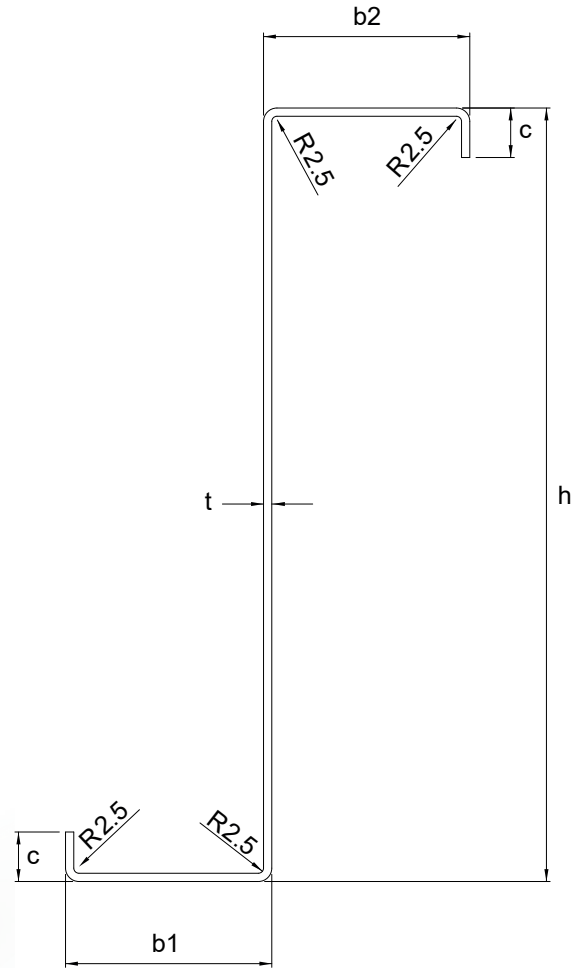

Z PROFILES

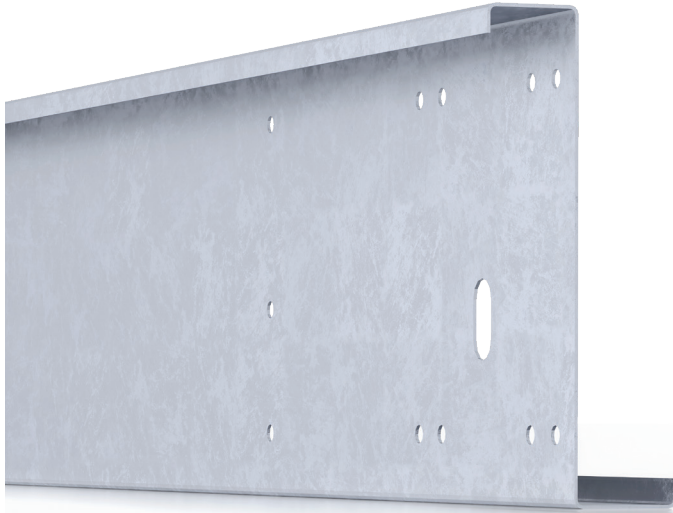

Section Type	h (mm)	b ₁ (mm)	c (mm)	b ₂ (mm)	t (mm)	G (kg/m)	A (cm ²)	I _y (cm ⁴)	W _y (cm ³)	I _z (cm ⁴)	W _z (cm ³)
Z 350	352	96	24	88	4,00	17,71	22,33	3869	219,5	325,7	36,23
	351	95		87	3,00	13,36	16,82	2928	166,2	249,4	27,74
Z 300	302	96	24	88	4,00	16,14	20,35	2678	177,2	325,6	36,28
	301	95		87	3,00	12,19	15,34	2028	134,2	249,3	27,78
	300	94		86	2,00	8,24	10,31	1367	90,5	174,4	19,44
Z 250	253	81	24	68	4,00	13,25	16,71	1519	119,4	170,6	22,76
	251	77			3,00	9,94	12,50	1133	90,0	125,8	16,97
					2,00	6,63	8,29	761	60,0	82,3	11,01
Z 200	203	72	24	61	4,00	11,11	14,02	830	81,5	122,7	18,56
	201	71			3,00	8,36	10,50	622	61,1	93,4	13,92
		69		60	2,00	5,56	6,96	417	41,0	59,1	8,88
	1,50				4,17	5,18	313	30,8	43,6	6,50	

The drawings in this brochure are just examples and show some real possibilities of production combinations, we invite you to inquire about any specific requests.

The values indicated in the table are nominal according to the drawings of the profile and vary according to their dimensional parameters, the actual production will be conditioned by the tolerances according to current regulations